

MITSUBISHI FUSO

FUSO **FV**

6x4 Prime Mover | 360 hp | 60 Ton GCW

Beyond Compare



**OGRA
COMPLIANCE**



WARRANTY
2 YEAR /
100,000KM

FUSO MASTER MOTORS(PVT.)LTD.
UAN: 111-MASTER(111-627-837)

FUSO

MITSUBISHI FUSO TRUCKS & BUSES
CORPORATION. JAPAN

FUSO TRUCK TRACTOR-FV517JR2RDR1

SPECIFICATIONS*

PERFORMANCE

Max. Speed	96 km / hr.
Max. Gradeability	21.5%

ENGINE

Model	MITSUBISHI 6D24-0AT2
Type	4 stroke cycle, 6 cylinder, water cooled, direct injection, turbocharged with intercooler diesel engine
Piston Displacement	11,945 cc
Bore x Stroke	130 mm x 150 mm
Max. Output	360 HP (268 kW) @ 2,300 rpm
Max. Torque	150 Kg.f.m (1,470 N.m) @ 1,500 rpm

CLUTCH

Type	Hydraulic control, coil spring type, single dry plate with air pressure assistance
Size	430 mm

TRANSMISSION

10 Forward and 2 Reverse Speed Overdrive transmission with air operated shift cylinder for splitter

Speed	Gear Type	Transmission Ratio	Final Reduction Ratio
1st Low / High	Constantmesh	9.153 / 7.005	56.437 / 43.193
2nd Low / High	Synchromesh	5.444 / 4.166	33.568 / 25.667
3rd Low / High	Synchromesh	3.080 / 2.357	18.991 / 14.533
4th Low / High	Synchromesh	1.762 / 1.349	10.864 / 08.318
5th Low / High	Synchromesh	1.000 / 0.765	06.166 / 04.717
Reverse Low / High	Constantmesh	7.929 / 6.068	48.890 / 37.415
Final Gear Ratio		6.166	

AXLE

Front	Reverse Elliot, "I" beam
Axle Capacity	7,500 kg
Rear	Full floating type, tandem drive with inter-axle differential gear and locking device
Axle Capacity	21,600 kg

BRAKES

Service	Full Air, dual circuit, wedge type. Equipped with ABS
Parking & Emergency	Spring loaded type on 1st & 2nd rear wheels by hand control valve
Auxiliary	Exhaust Brake and Powertard

STEERING

Type	Power Steering. Ball nut type with integral type hydraulic power booster. Telescopic and tilt steering column with steering lock.
------	---

TYRE

Size	11.00-20-16PR
No. of Studs	10

FUEL TANK

Capacity	400 Liters
----------	------------

ELECTRICAL SYSTEM


Battery	12 Volt x 2, 170 AH
Generator	24 Volt, 50 Amp

WEIGHT

Max. GCW	kg	60,000
Kerb Weight	kg	7,795
Front	kg	4,030
Rear	kg	3,765

DIMENSIONS

Wheelbase	mm	4,520
Overall Length	mm	6,690
Overall Width	mm	2,490
Overall Height (Approx.)	mm	2,890
Tread Front	mm	2,050
Tread Rear	mm	1,850

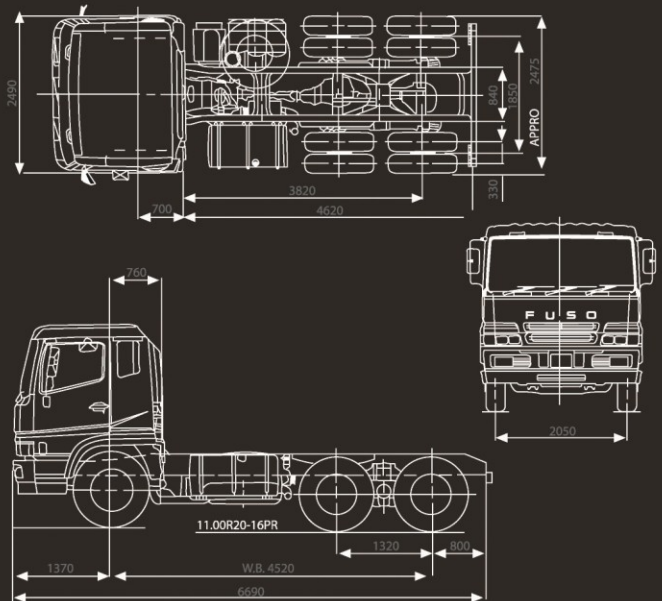

CAB

Construction All steel, Coil Spring Suspension Cab, tilted by Hydraulic Cylinder

*Specifications are with normal manufacturing allowances & tolerances & are subject to change without prior notice due to our on-going research & development program or to meet local conditions & Government requirements. Original product may vary from the one presented in this flyer. 5th wheel comes as optional item.

KARACHI

FUSO MASTER MOTORS (PVT.) LTD.

168-E P.E.C.H.S Khalid Bin Waleed Road,
Tel : 021-111-627-837
Cell: 0300-2953266, 0301-8504124

LAHORE

FUSO MASTER MOTOR (PVT.) LTD.

16-km Multan Road, Lahore
Tel: 042-111-627-837
Cell: 0301-8202867, 0300-8420131

MULTAN

FUSO MASTER AL KHAIR MOTORS

Near Daewoo Bus Terminal, Khanewal Road.
Tel: 061-6779033, 061-6779044

ISLAMABAD

FUSO MASTER MOTORS (PVT.) LTD.

Plot # 744-B, Mahrabad, Peshawar Road Rawalpindi.
Tel: 051-54781580
Cell: 0301-8260212, 0301-8260213

FAISALABAD

FUSO MASTER MOTORS (PVT.) LTD.

Gutt wala chowk, 14 km Sheikhpura Road,
Faisalabad. Tel: 041-8723434, 0301-8224192

PESHAWAR

FUSO MASTER MOTORS (PVT.) LTD.

Jagra Stop, Main GT Road, Opposite Marwat Filling
Station, Peshawar. Tel: 091-3580098-9, 0301-8227651

MITSUBISHI FUSO Authorized Distributor
FUSO MASTER MOTORS (PVT.) LTD.